

## Instruction Manual for Zoom/Focus Gears

### FOREWORD

Thank you for your purchase of a NAUTICAM product.

At NAUTICAM, we pride ourselves in the ability to recognise the requirements of professional as well as amateur underwater photographers and fulfill them through the innovative designs of our products. We strive to achieve a high level of user-friendliness by allowing stress-free installation and easy operation of all important functions of the camera.

Please read this manual carefully before using the product, this will maximise its performance as well as its lifetime.

### WARRANTY

All NAUTICAM Products are warranted against any material and manufacturing defects for two years from the date of purchase for consumer use. This warranty only applies to products purchased from authorised NAUTICAM dealers and does not extend beyond the original retail purchaser.


To return your product for service, please contact your regional authorized service centre(s). Please note that this warranty only applies when the product is purchased in the territory where the service centre is located.

NAUTICAM does not hold responsibility for damage, of any nature, to any equipment used with and/or placed within our products.

NAUTICAM accepts no liability for any loss of captured images or the inability to capture images even if it is due to the malfunctioning of our products.


Unauthorised modifications and/or repairs of our products will automatically invalidate the warranty.

### IDENTIFICATION OF PARTS

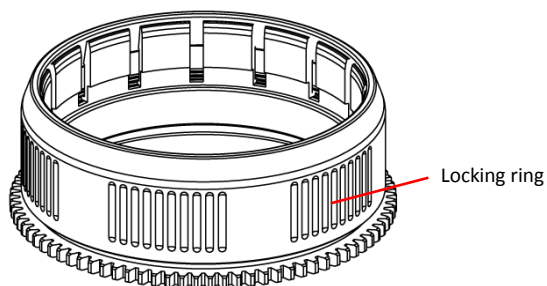


*Note: #37141 SE2870-Z is used as an example in the above image, other gears will be slightly different in term of appearance.*


### MOUNTING THE GEAR TO THE LENS

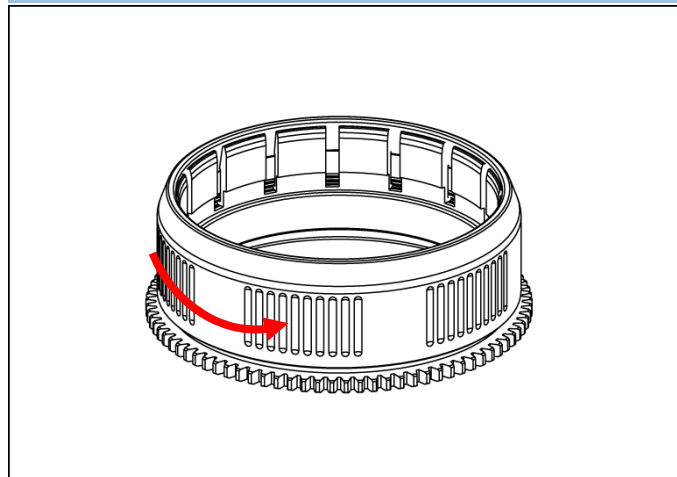

Loose the gear by turning the locking ring anti-clockwise while holding the toothed part firmly, until it can be inserted onto the lens.

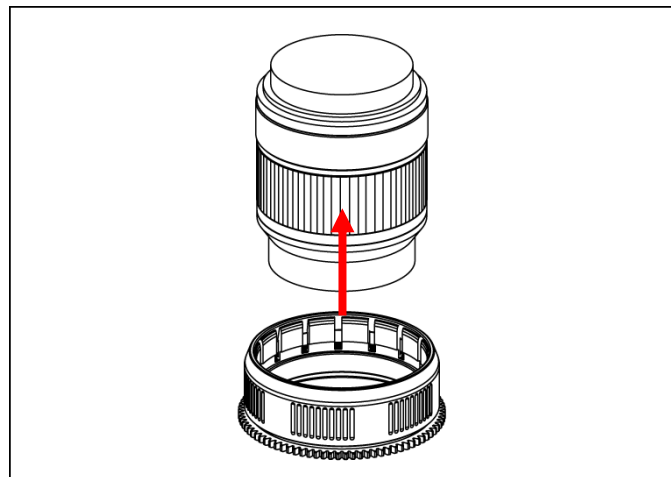

Insert the gear as shown and place it over the lens zoom/focus ring.

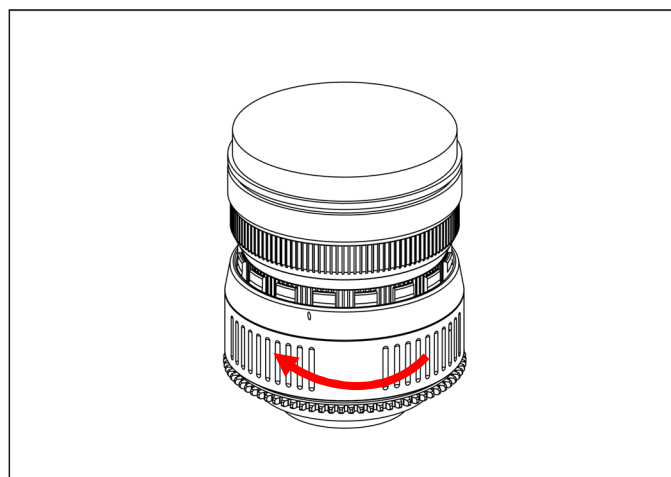


Tighten the zoom/focus gear by turning the locking ring clockwise while holding the toothed part firmly, until it cannot go in any further.

To remove the gear, reverse the above steps.

### ALIGNMENT


For some of the lenses, alignment is required before inserting the gear onto the lens.

For #36062 PL818-Z:

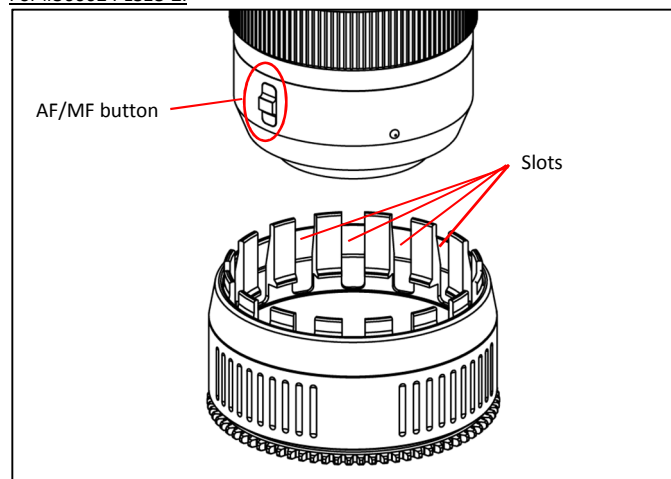

Align the AF/MF button on the lens with one of the slot on the zoom gear. Insert the gear as shown all the way up until it stop.

For 36153 N6.713-Z:

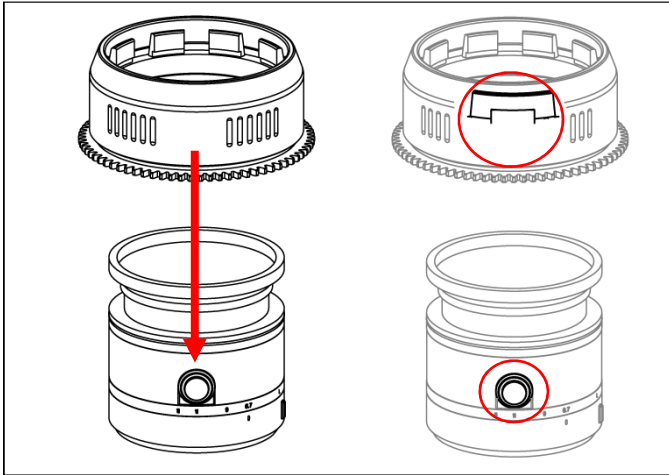

Align the “opening” of the gear with the button on the lens barrel. Insert the gear of N6.713-Z as shown and place it over the lens zoom ring.

----- END -----