

## Instruction Manual for Flip Holder for EMWL

PN# 87501

### FOREWORD

Thank you for your purchase of a NAUTICAM product.

At NAUTICAM, we pride ourselves in the ability to recognize the requirements of professional as well as amateur underwater photographers and fulfill them through the innovative designs of our products. We strive to achieve a high level of user-friendliness by allowing stress-free installation and easy operation of all important functions of the camera.

Please read this manual carefully before using the product, this will maximize its performance as well as its lifetime.

### WARRANTY

All NAUTICAM Products are warranted against any material and manufacturing defects for two years from the date of purchase for consumer use. This warranty only applies to products purchased from authorized NAUTICAM dealers and does not extend beyond the original retail purchaser.


To return your product for service, please contact your regional authorized service center(s). Please note that this warranty only applies when the product is purchased in the territory where the service center is located.

NAUTICAM does not hold responsibility for damage, of any nature, to any equipment used with and/or placed within our products.


NAUTICAM accepts no liability for any loss of captured images or the inability to capture images even if it is due to the malfunctioning of our products.

Unauthorized modifications and/or repairs of our products will automatically invalidate the warranty.


### IDENTIFICATION OF PART

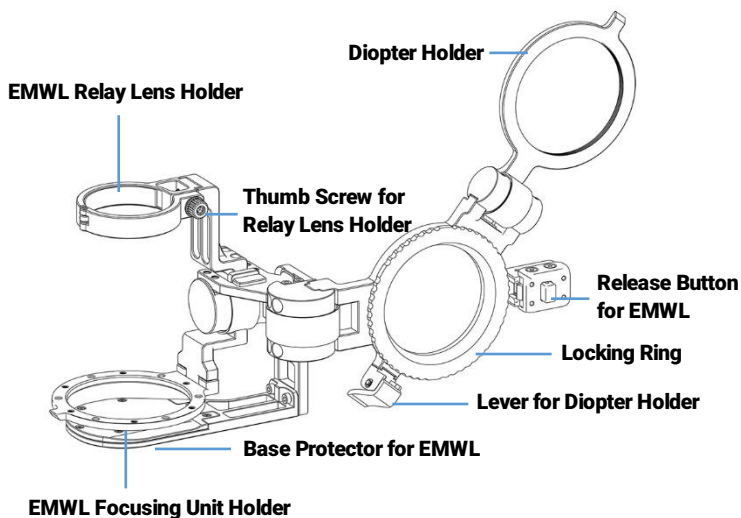


### INSTALL TO THE PORT

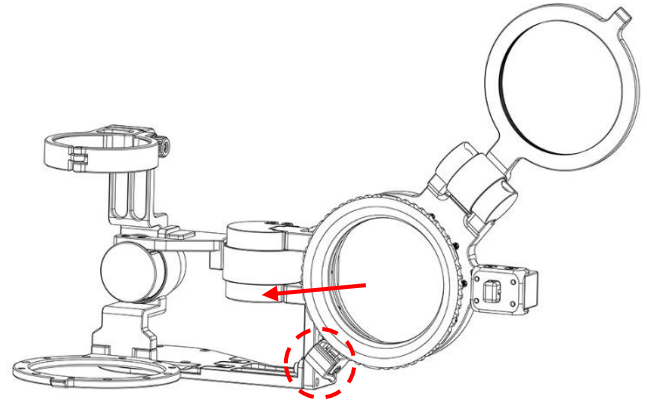

1. Press the lever for diopter holder and open the diopter holder to the side then remove the locking ring from the flip holder.

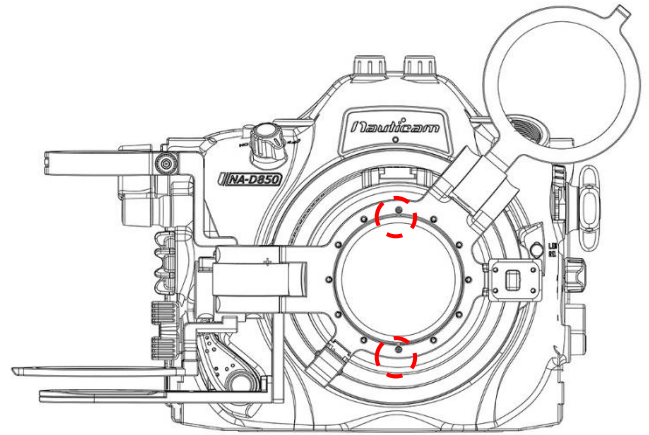


2. Align the two positioning screws on the back of the holder with the slots on the front of the port.

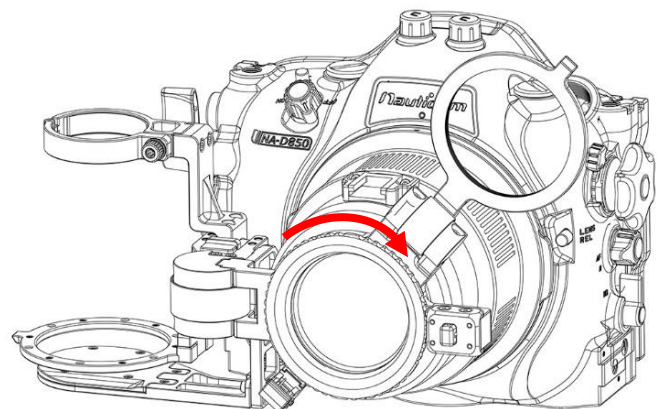


3. Fasten the holder by screwing the locking ring into the thread on the front of the port.


## MOUNT EMWL ON THE FLIP HOLDER

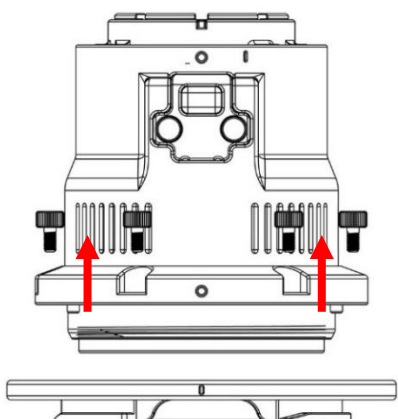


1. Remove a bayonet mounting ring from EMWL focusing unit by unscrewing 6x thumb screws as shown.

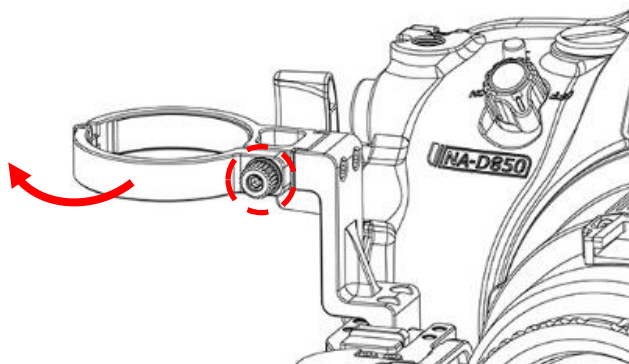


2. Open the relay lens holder by unscrewing the thumb screw.

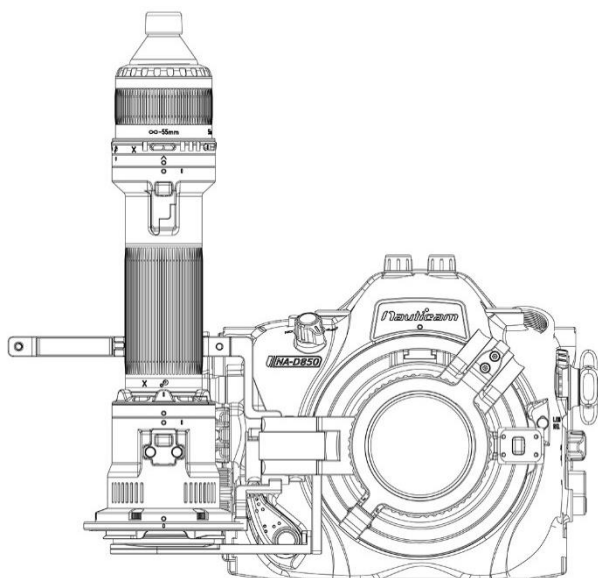

3. Mount the EMWL focusing unit on the EMWL holder as shown.

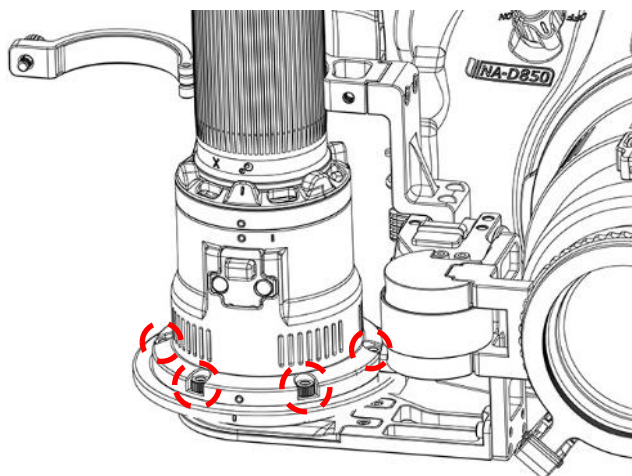

4. Secure the EMWL on the flip holder by tightening 6x thumb screws.

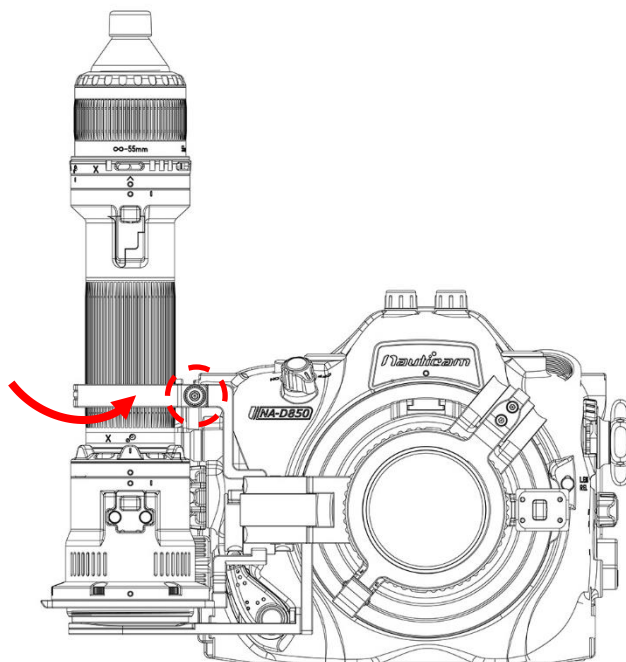

5. Close the relay lens holder and securely tighten with the thumb screw.

## SPECIFICATIONS

Weight (air/underwater):	600g / 400g
Compatible ports:	18702 Macro port 87 18703 Macro port 94 37126 N100 Macro port 105 18708 N120 Macro Port 80

Remark: Nauticam supports only e-manuals. Please download corresponding product manuals on [Nauticam.com](http://Nauticam.com) website, or contact us for e-manuals.

Current as of 2020-11-02